

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 0 930 757 A1

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:
21.07.1999 Bulletin 1999/29

(51) Int. Cl.⁶: H04L 29/06

(21) Application number: 98310754.1

BEST AVAILABLE COPY

(22) Date of filing: 24.12.1998

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor:
Nagasaka, Fumio,
Seiko Epson Corporation
Suwa-shi, Nagano-ken 392-8502 (JP)

(30) Priority: 24.12.1997 JP 36710797
16.02.1998 JP 5136098

(74) Representative:
Tothill, John Paul et al
Frank B. Dehn & Co.
179 Queen Victoria Street
London EC4V 4EL (GB)


(71) Applicant:
SEIKO EPSON CORPORATION
Shinjuku-ku, Tokyo 163-0811 (JP)

(54) Data transfer utilizing preview data

(57) In an image data server 200, a preview data generation unit 218 generates preview data corresponding to image data, and a transmission controller 211 transmits the preview data to a computer system 100 in an image receiver apparatus. In accordance with another possible application, the preview data is not generated by the image data server 200, but is generated by a computer system 300 in an image transmitter apparatus, which transmits the image data to the image data server 200, and transmitted to the image data server 200. In the computer system 100 in the image receiver apparatus, a display controller 113 causes the contents of the preview data to be displayed on the screen of a monitor 150. The user determines whether or not the image data corresponding to the displayed

preview image is required. In response to an instruction for transfer of the image data input from the user, a transmission controller 111 transmits a request for transfer of the image data to the image data server 200. The transmission controller 211 then transmits the image data, which is the object of the request for transfer, to the computer system 100 in the image receiver apparatus. A print controller 114 causes the image data to be subjected to predetermined image processing, and a printer 180 prints the processed image data on a printing sheet of paper. This arrangement of the present invention enables the image receiver apparatus to selectively receive only the required data.

Fig 1

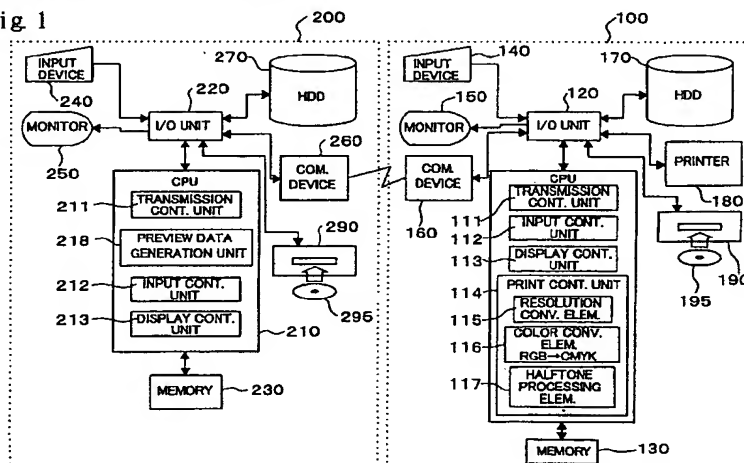

EP 0 930 757 A1

Description

[0001] The present invention relates to a technique for transmitting data between apparatuses respectively connected to a network.

Description of the Related Art

[0002] Facsimile and E-mail are known means for transmitting image data between apparatuses respectively connected to a telephone communication network, the Internet, or an intranet.

[0003] These known means transmit image data irrespective of the intentions of a receiver, and do not allow the receiver to selectively receive only the required image data. The image data generally has an extremely large data capacity. In the case where the transmitted image data is not required, such data transmission wastefully consumes the communication resources as well as the resources in the receiver, such as printing paper (in the case of facsimile) and the data storage area (in the case of E-mail).

[0004] The object of the present invention is thus to provide a data transfer system and a method of data transmission that allow a receiver to selectively receive only required data.

[0005] At least part of the above and the other related objects is realized by a data transfer system including: a transmitter; and a receiver connected to the transmitter via a network. The transmitter includes a memory that stores original data, a first transmission unit that transmits the original data and preview data created corresponding to the original data, and a first controller that controls operation of the transmitter. The receiver includes a second transmission unit that receives at least the preview data, an input unit, an output unit, and a second controller that controls operation of the receiver. The first controller causes the first transmission unit to send the preview data to the receiver, whereas the second controller receives the preview data from the second transmission unit and subsequently causes the output unit to output a preview image represented by the preview data. The second controller causes the second transmission unit to send a request for transfer of the original data to the transmitter when an instruction for transfer of the original data is input into the receiver via the input unit. The first controller causes the first transmission unit to send the original data stored in the memory to at least one of the receiver and another apparatus connected to the network when receiving the request for transfer of the original data from the first transmission unit.

[0006] The present invention is also directed to a transmitter for transmitting data to a receiver via a network. The transmitter includes: a memory that stores original data; a transmission unit that transmits the original data and preview data created corresponding to the original data; and a controller that controls operation of

the transmitter. The controller causes the transmission unit to send the preview data to the receiver. The controller causes the transmission unit to send the original data stored in the memory to at least one of the receiver and another apparatus connected to the network when receiving a request for transfer of the original data transmitted from the receiver via the transmission unit.

[0007] The present invention is also directed to a receiver for receiving data from a transmitter via a network. The receiver includes: a transmission unit that receives at least preview data created corresponding to original data; an input unit; an output unit; and a controller that controls operation of the receiver. The controller causes the output unit to output a preview image represented by the preview data when receiving the preview data transmitted from the transmitter via transmission unit. The controller causes the transmission unit to send a request for transfer of the original data to the transmitter when an instruction for transfer of the original data is input into the receiver via the input unit.

[0008] The present invention is also directed to a method of transmitting data between a transmitter and a receiver each connected to a network. The method includes the steps of: (a) causing the transmitter to transmit preview data created corresponding to original data to the receiver; (b) causing the receiver to output a preview image represented by the preview data when the receiver receives the preview data; (c) causing the receiver to transmit a request for transfer of the original data to the transmitter when an instruction for transfer of the original data is input into the receiver; and (d) causing the transmitter to transmit the original data to at least one of the receiver and another apparatus connected to the network when the transmitter receives the request for transfer.

[0009] The present invention is also directed to a computer program product that causes a computer to transmit data to a receiver via a network. The computer program product includes: a computer readable medium; a first program code unit that causes the computer to transmit preview data created corresponding to original data to the receiver; a second program code unit that causes the computer to receive a request for transfer of the original data when the receiver transmits the request for transfer; and a third program code unit that causes the computer to transmit the original data to at least one of the receiver and another apparatus connected to the network, when the computer receives the request for transfer, wherein each of the program code units is stored on the computer readable medium.

[0010] The present invention is also directed to a computer program product that causes a computer to receive data from a transmitter via a network. The computer program product includes: a computer readable medium; a first program code unit that causes the computer to receive preview data created corresponding to original data when the transmitter transmits the preview data; a second program code unit that causes the com-

puter to output a preview image represented by the preview data when the computer receives the preview data; and a third program code unit that causes the computer to transmit a request for transfer of the original data to the transmitter when the computer receives an instruction for transfer of the original data, wherein each of the program code units is stored on the computer readable medium.

[0011] In the arrangement of the present invention, the transmitter transmits the preview data, which has been created corresponding to the original data, to the receiver. The receiver then outputs the preview image represented by the transmitted preview data to enable the visual check. For example, the receiver causes the preview image represented by the preview data to be displayed on the screen of a monitor or to be printed on printing paper by a printer, in order to enable the user to visually check the output.

[0012] The user of the receiver visually checks the preview image represented by the preview data and determines whether or not the original data corresponding to the preview data. In the case where the corresponding original data is required, the user inputs an instruction for transfer of the original data to the receiver through the operation of the input unit. The receiver transmits a request for transfer of the original data to the transmitter in response to the input instruction. The transmitter receives the request for transfer and transmits the required original data to a preset apparatus. The preset apparatus may be identical with or different from the receiver.

[0013] The data transfer system of the present invention transmits the preview data irrespective of the intentions of the user of the receiver. The preview data has, however, an extremely smaller data capacity than that of the original data. This accordingly does not wastefully consume the communication resources or the resources of the receiver. The receiver visually checks the contents of the preview data and issues a request for transfer of only the required original data, so as to enable only the required original data to be received by a preset apparatus. This arrangement effectively prevents the communication resources and the resources in the receiver from being wastefully consumed.

[0014] These and other objects, features, aspects, and advantages of the present invention will become more apparent from the following detailed description of the preferred embodiments described by way of example only, with reference to the accompanying drawings.

Fig. 1 is a block diagram illustrating an image data transfer system in a first embodiment according to the present invention;

Fig. 2 shows an example of the image data transfer system of Fig. 1 actualized on the Internet;

Fig. 3 is a flowchart showing a processing routine executed in the data transfer system of Fig. 1;

Fig. 4 shows one exemplified window for print settings displayed on the screen of a monitor 150 based on user interface data;

Fig. 5 shows another exemplified window for print settings displayed on the screen of the monitor 150 based on the user interface data; and

Fig. 6 is a block diagram illustrating the structure of a mobile terminal 400 used in an image data transfer system in a second embodiment according to the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0015] Fig. 1 is a block diagram illustrating an image data transfer system in a first embodiment according to the present invention. Fig. 2 shows an example of the image data transfer system of Fig. 1 actualized on the Internet.

[0016] The image data transfer system of the embodiment includes a computer system 100 in an image receiver apparatus and an image data server 200. The computer system 100 in the image receiver apparatus is connected with the image data server 200 via the Internet 500 as shown in Fig. 2. A computer system 300 in an image transmitter apparatus as well as a mobile terminal 400 is also connected to the Internet 500. Although the respective apparatuses are directly connected to the Internet in the illustration of Fig. 2, these apparatuses are generally connected to the Internet 500 indirectly via a telephone communication network or another network, such as LAN.

[0017] Referring to Fig. 1, the computer system 100 in the image receiver apparatus includes a CPU 110 that carries out a variety of processing and control operations according to computer programs, an I/O unit 120 that transmits data to and from a variety of peripheral devices, and a memory 130, in which the computer programs are stored and data obtained in the course of processing are temporarily registered. The computer system 100 further includes an input device 140 that is used to input, for example, an instruction from a user, a monitor 150, on which the contents of data are displayed, a communication device 160 that communicates with another apparatus via the network, a hard disk drive 170, in which a variety of data are stored, a printer 180 that is used to print the contents of data, and a CD-ROM drive 190.

[0018] The CPU 110 carries out the processing and control operations according to the computer programs, so as to function as a transmission control unit 111, an input control unit 112, a display control unit 113, and a print control unit 114.

[0019] Like the computer system 100 in the image receiver apparatus, the image data server 200 includes a CPU 210, an I/O unit 220, a memory 230, an input device 240, a monitor 250, a communication device 260, a hard disk drive 270, and a CD-ROM drive 290.

[0020] The CPU 210 carries out a variety of process-

ing and control operations according to computer programs stored in the memory 230, so as to function as a transmission control unit 211, an input control unit 212, a display control unit 213, and a preview data generation unit 218.

[0021] In this embodiment, the computer programs (that is, applications programs) recorded in recording media, CD-ROMs 195 and 295 are respectively read by the CD-ROM drives 190 and 290 and taken into the computer system 100 in the image receiver apparatus and the image data server 200. The input computer programs are transferred to the hard disk drives 170 and 270 and transmitted to the memories 130 and 230, for example, at the time of starting the operation.

[0022] This embodiment utilizes the CD-ROMs as the recording media, in which the computer programs are recorded in a computer readable manner. A variety of other computer readable media may also be used for the recording media; for example, flexible disks, magneto-optic discs, IC cards, ROM cartridges, punched cards, prints with bar codes or other codes printed thereon, and internal storage devices (memories, such as RAM and ROM) and external storage devices of the computer.

[0023] Instead of reading the computer programs stored in such recording media, the user may access a program server (not shown) for supplying computer programs via the network and take the computer programs from the program server into the computer system 100 in the image receiver apparatus or the image data server 200.

[0024] Part of the computer programs may be replaced by the operating system.

[0025] In this embodiment, the software actualizes the functions of the transmission control unit 111, the input control unit 112, the display control unit 113, and the print control unit 114 in the computer system 100 of the image receiver apparatus as well as the transmission control unit 211, the input control unit 212, the display control unit 213, and the preview data generation unit 218 in the image data server 200. The functions of these units may otherwise be actualized by the hardware structure.

[0026] Fig. 3 is a flowchart showing a processing routine executed in the data transfer system of Fig. 1. The fundamental operation of this embodiment is described by referring to the flowchart of Fig. 3. Here it is assumed that required image data is transferred from the computer system 300 in the image transmitter apparatus to the computer system 100 in the image receiver apparatus.

[0027] Referring to Fig. 2, the computer system 300 in the image transmitter apparatus transmits required image data to the image data server 200 via the Internet at step S20. The image data, for example, consists of gray-scaled bit-map data of R, G, and B. In the image data server 200 shown in Fig. 1, the communication device 260 receives the transmitted image data, and the transmission control unit 211 of the CPU 210 stores the

input image data into the hard disk drive 270 via the I/O unit 220. The hard disk drive 270 stores such transmitted image data as well as user interface data discussed later.

[0028] The preview data generation unit 218 reads the image data from the hard disk drive 270, generates preview data based on the input image data, and stores the preview data into the hard disk drive 270 at step S22. One concrete procedure causes the image data to undergo an image processing operation, such as a data skipping operation, and generates reduced image data as the preview data. Another concrete procedure extracts attribute information (for example, the creator or transmitter of the image, the date of creation, the name and the type of the image) from the information attached to the image data and generates attribute data as the preview data.

[0029] The transmission control unit 211 subsequently reads the generated preview data from the hard disk drive 270 and transmits the input preview data via the communication device 260 to the client or the computer system 100 in the image receiver apparatus at step S24. The transmission control unit 211 also reads the user interface data from the hard disk drive 270 and transmits the input user interface data to the computer system 100 in the image receiver apparatus at step S26.

[0030] In the computer system 100 of the image receiver apparatus, the communication device 160 receives the transmitted preview data and user interface data, and the transmission control unit 111 of the CPU 110 stores the input preview data and user interface data into the hard disk drive 170 via the I/O unit 120.

[0031] When the user of the computer system 100 in the image receiver apparatus inputs an instruction for displaying a preview image through the operation of the input device 140, the input control unit 112 transmits the instruction to the display control unit 113. The display control unit 113 then reads the preview data and the user interface data from the hard disk drive 170 and causes the contents of the preview data and the user interface data to be displayed on the screen of the monitor 150 at step S28. A preview image corresponding to the preview data is accordingly displayed in a window based on the user interface data on the screen of the monitor 150.

[0032] The user checks the displayed preview image and determines whether or not the original image data corresponding to the preview data is required at step S30. When the corresponding original image data is not required, the user inputs an instruction for terminating the display of the preview image and concludes a series of the processing. When the corresponding original image data is required, on the other hand, the user inputs an instruction for displaying a window for print settings, that is, a window for enabling input of various pieces of setting information that are used to print the image represented by the original image data on a

sheet of printing paper. In one exemplified structure, the user interface data provides specific buttons in the window that respectively correspond to the instruction for terminating the display of the preview image and the instruction for displaying the window for print settings. The user clicks the required button through the operation of the input device 140 to input the desired instruction.

[0033] In the case where the instruction for displaying the window for print settings is input, the input control unit 112 transfers the instruction to the transmission control unit 111, and the transmission control unit 111 transmits a request for transfer of the required user interface data, which is used to display the window for print settings, via the communication device 160 to the image data server 200 at step S32.

[0034] In the image data server 200, the communication device 260 receives the transmitted request for transfer, and the transmission control unit 211 reads the user interface data, which is used to display the window for print settings, from the hard disk drive 270 and transmits the input user interface data to the computer system 100 in the image receiver apparatus via the communication device 260 at step S34.

[0035] In this embodiment, the user interface data provided in the image data server 200 is not exclusively used by the computer system 100 of the image receiver apparatus, but is generally used by a large number of clients connected to the Internet 500. The user interface data thus mainly consists of HTML data written in HTML (HyperText Markup Language).

[0036] The Internet 500 is in the environment where various machine types coexist. It is difficult for the image data server 200 to check the machine type of each client. In the case where the user interface data is generated according to a program that depends upon a specific machine type and is supplied to each client, some clients naturally can not utilize the user interface data. It is, however, practically impossible to provide the user interface data for each machine type and supply the required user interface data corresponding to the machine type of each client. This embodiment thus generates the user interface data written in the HTML that is independent of the machine type and is easily utilized.

[0037] The HTML data includes image data, such as GIF (graphics Interchange Format) and JPEG (Joint Photographic Experts Group), and other data related thereto with predetermined tags. Data written in JAVA (a programming language developed by Sun Microsystems Corp.) that is also independent of the machine type may be used instead of the HTML data.

[0038] In the computer system 100 of the image receiver apparatus, when the communication device 160 receives the transmitted user interface data, while the transmission control unit 111 stores the input user interface data into the hard disk drive 170, the display control unit 113 displays the user interface window represented by the user interface data, that is, the window

for print settings, on the screen of the monitor 150 at step S36. As described previously, the user interface data is the HTML data and thus readily displayed using a known Web browser software.

[0039] Figs. 4 and 5 respectively show exemplified windows for print settings displayed on the screen of the monitor 150, based on the transmitted user interface data. Fig. 4 shows the window for paper settings, and Fig. 5 shows the window for print specification.

[0040] The window for paper settings as shown in Fig. 4 is first displayed on the screen of the monitor 150. The user of the computer system 100 in the image receiver apparatus inputs details of paper settings 151, which include the paper size, the paper source, the orientation, and the print size, corresponding to the printing paper set in the printer 180 through the operation of the input device 140. On conclusion of the input, the user clicks an OK button 152. This causes the window for print specification as shown in Fig. 5 to appear. The user then inputs details of print specification 154, which include the number of copies, the printing range, the printing quality, the paper type, and the ink color, according to the requirements through the operation of the input device 140. At step S38, the user clicks an OK button 155 when it is required to transmit the original image data and print the image represented by the original image data, whereas the user clicks a Cancel button 156 when it is not required.

[0041] The input control unit 112 transmits the various pieces of input setting information and the results of button clicking to the transmission control unit 111. In the case where the Cancel button 156 is clicked in the window for print specification, the transmission control unit 111 concludes the series of processing. In the case where the OK button 155 is clicked in the window for print specification, on the other hand, the transmission control unit 111 transmits a request for transfer of the original image data as well as the input setting information to the image data server 200 via the communication device 160 at step S40.

[0042] In the image data server 200, when the communication device 260 receives the transmitted request for transfer and setting information, the transmission control unit 211 transmits back all or part of the setting information via the communication device 260 to the computer system 100 in the image receiver apparatus at step S42. As described previously, the user interface data fed from the image data server 200 to the computer system 100 in the image receiver apparatus is the HTML data. The user interface data may thus have a mechanism for calling a software component, in order to utilize a CGI (Common Gateway Interface) function on the image data server 200. This embodiment takes advantage of this mechanism set in the user interface data and causes the setting information transmitted from the computer system 100 in the image receiver apparatus to be transmitted back from the image data server 200 to the computer system 100 in the image

fer of the original data is input into the receiver via the input unit.

6. A method of transmitting data between a transmitter and a receiver each connected to a network, the method comprising the steps of:

(a) causing the transmitter to transmit preview data created corresponding to original data to the receiver;

(b) causing the receiver to output a preview image represented by the preview data when the receiver receives the preview data;

(c) causing the receiver to transmit a request for transfer of the original data to the transmitter when an instruction for transfer of the original data is input into the receiver; and

(d) causing the transmitter to transmit the original data to at least one of the receiver and another apparatus connected to the network when the transmitter receives the request for transfer.

7. A method in accordance with claim 6, wherein the step (a) comprises the step of: causing the transmitter to transmit user interface data together with the preview data to the receiver,

wherein the step (b) comprises the step of: causing the receiver to output a user interface window represented by the user interface data when the receiver receives the user interface data together with the preview data,

wherein the step (c) comprises the step of: causing the receiver to transmit specification information, which is used to cause a image represented by the original data to be output, together with the request for transfer of the original data to the transmitter when the receiver receives the specification information together with the instruction for transfer of the original data, and

wherein the step (d) comprises the step of: causing transmitter to transmit at least part of the specification information to the apparatus, to which the original data is to be transmitted, when the transmitter receives the specification information together with the request for transfer.

8. A method in accordance with claim 6 or 7, wherein the step (c) comprises the step of: causing the receiver to transmit address information that specifies a location on the network, to which the original data is to be transmitted, together with the request for transfer of the original data to the transmitter when the receiver receives the address information together with the instruction for transfer of the original data, and

wherein the step (d) comprises the step of: causing the transmitter to transmit the original data to the

location specified by the address information when the transmitter receives the address information together with the request for transfer.

9. A computer program product that causes a computer to transmit data to a receiver via a network, the computer program product comprising:

a computer readable medium;

a first program code unit that causes the computer to transmit preview data created corresponding to original data to the receiver;

a second program code unit that causes the computer to receive a request for transfer of the original data when the receiver transmits the request for transfer; and

a third program code unit that causes the computer to transmit the original data to at least one of the receiver and another apparatus connected to the network when the computer receives the request for transfer, wherein each of the program code units is stored on the computer readable medium.

10. A computer program product in accordance with claim 11, wherein the first program code unit causes the computer to transmit user interface data together with the preview data to the receiver, wherein the second program code unit causes the computer to receive specification information, which is used to cause a image represented by the original data to be output, together with the request for transfer of the original data when the receiver transmits the specification information together with the request for transfer, and wherein the third program code unit causes the computer to transmit at least part of the specification information to the apparatus, to which the original data is to be transmitted, when the computer receives the specification information together with the request for transfer.

weight that enable the user to freely carry the mobile terminal 400.

[0056] In this embodiment, while the preview data is transmitted to the mobile terminal 400, the original image data is transmitted to the apparatus that is specified by the user of the mobile terminal 400. As shown in Fig. 6, the mobile terminal 400 does not have a hard disk drive or a printer. It is accordingly impossible for the mobile terminal 400 to store the original image data and print the contents of the image data even when the original image data is transmitted from the image data server 200. The original image data is accordingly transmitted to a desired apparatus other than the mobile terminal 400.

[0057] The following describes the operations of the second embodiment with referring to Figs. 1 and 6. Among the operations of the second embodiment, the operations up to generation of the preview data in the image data server 200 are identical with those of the first embodiment and are thereby not specifically described here.

[0058] In the image data server 200, the transmission control unit 211 reads the generated preview data from the hard disk drive 270 and transmits the preview data via the communication device 260 to the client or mobile terminal 400. The transmission control unit 211 also reads the user interface data from the hard disk drive 270 and transmits the user interface data to the mobile terminal 400.

[0059] In the mobile terminal 400, the communication device 460 receives the transmitted preview data and user interface data, and the transmission control unit 411 of the CPU 410 stores the input preview data and user interface data into the memory 430. The preview data has an extremely smaller data capacity than that of the original image data and can thus be stored in the memory 430 without any troubles.

[0060] When the user of the mobile terminal 400 inputs an instruction for displaying a preview image through the operation of the input device 440, the input control unit 412 transfers the instruction to the display control unit 413. The display control unit 413 then reads the preview data and the user interface data from the memory 430 and causes the contents of the preview data and the user interface data on the screen of the monitor 450.

[0061] The user checks the preview image and determines whether or not the original image data corresponding to the preview data is required. When the corresponding original image data is required, the user inputs an instruction for displaying the window for print settings. The input control unit 412 then transfers the instruction to the transmission control unit 411, and the transmission control unit 411 transmits a request for transfer of the user interface data, which is used to display the window for print settings, to the image data server 200 via the communication device 460.

[0062] In the image data server 200, the communica-

tion device 260 receives the transmitted request for transfer, and the transmission control unit 211 reads the user interface data for displaying the window for print settings from the hard disk drive 270 and transmits the user interface data to the mobile terminal 400 via the communication device 260.

[0063] In the mobile terminal 400, the communication device 460 receives the transmitted user interface data, and the transmission control unit 411 stores the input user interface data into the memory 430. Simultaneously the display control unit 413 causes the user interface window of the user interface data, that is, the window for print settings, to be displayed on the screen of the monitor 450.

[0064] The windows for print settings displayed in the second embodiment are similar to those shown in Figs. 4 and 5, except several additional data areas. The additional data areas include a data area for setting an address of transmission of the image data and a data area for setting a date and time for reserved transmission of the image data.

[0065] Information representing the location of an apparatus, to which the original image data is to be actually transmitted, (that is, an apparatus selected by the user to receive the original image data), on the Internet 500 is input into the data area for setting the address of transmission of the image data. Concrete examples of such information include an IP (Internet Protocol) address or URL (Uniform Resource Locator) of the desired apparatus. The apparatus, to which the original image data is to be transmitted, should have the capability to store the transmitted image data and print the contents of the image data. It is thus required for the user of the mobile terminal 400 to specify an appropriate apparatus having such capability as the address of transmission of the image data. In this embodiment, the computer system 100 in the image receiver apparatus is specified as the address of transmission of the image data. The user accordingly inputs the IP address of the computer system 100 in the image receiver apparatus into the data area for setting the address of transmission of the image data.

[0066] The date and time, when the original image data is to be transmitted from the image data server 200 to the specified address, is input into the data area for setting the date and time for reserved transmission of the image data. For example, when the computer system 100 in the image receiver apparatus specified as the address of transmission of the image data is remote from the mobile terminal 400, the user of the mobile terminal 400 can not grasp the current state of the computer system 100 in the image receiver apparatus. Even when the image data is transmitted from the image data server 200, there is a possibility that the computer system 100 in the image receiver apparatus can not receive the image data or print the contents of the image data. One preferable procedure specifies in advance the date and time when the image data server 200 will transmit

the original image data and causes the computer system 100 in the image receiver apparatus specified as the address of transmission of the image data to prepare for receiving the image data. This arrangement enables the computer system 100 in the image receiver apparatus to securely receive the transmitted image data and print the contents of the image data.

[0067] The input control unit 412 transmits the various pieces of input setting information and the results of button clicking to the transmission control unit 411. When the OK button 155 is clicked in the window for print specification, the transmission control unit 411 transmits the setting information as well as the request for transfer of the original image data to the image data server 200 via the communication device 460.

[0068] In the image data server 200, when the communication device 260 receives the transmitted request for transfer and setting information, the transmission control unit 211 sets the date and time for reserved transmission of the image data into a timer while storing the setting information into the hard disk drive 270. The transmission control unit 211 then reads the original image data, which is the target of the request for transfer, and the setting information from the hard disk drive 270 on the date and time set in the timer for reserved transmission of the image data. The transmission control unit 211 subsequently transmits the image data and the setting information to the computer system 100 in the image receiver apparatus, based on the information representing the address of transmission of the image data.

[0069] The operations after the transmission of the image data from the image data server 200 in the second embodiment are identical with those of the first embodiment and are thereby not specifically described here.

[0070] As described above, the structure of the second embodiment enables the user of the mobile terminal 400 to visually check the preview image displayed on the mobile terminal 400. In the case where the original image data corresponding to the preview data is required, the user can receive the desired original image data in a desired apparatus.

[0071] The user interface data consists of the HTML data as described previously. When the user interface data has the mechanism for calling the software component to utilize the CGI, the mobile terminal 400 can remote control the functions of the image data server 200. This arrangement enables the image data server 200 to be in charge of the high-performance processing, when the CPU 410 of the mobile terminal 400 has a relatively low processing capacity.

[0072] In the above embodiments, the preview data is generated in the image data server 200. It is, however, not necessary to generate the preview data in the image data server 200. Another possible application generates the preview data in the computer system 300 of the image transmitter apparatus and transmits the preview

data together with the corresponding original image data to the image data server 200.

[0073] In the above embodiments, the required image data is once transmitted from the computer system 300 in the image transmitter apparatus to the image data server 200. The preview data and the image data are then transmitted from the image data server 200 to the receiver, for example, the computer system 100 in the image receiver apparatus or the mobile terminal 400. The principle of the present invention is, however, not restricted to this arrangement. In the case where the computer system 300 in the image transmitter apparatus has the functions equivalent to those of the image data server 200, the preview data and the image data may be transmitted directly from the computer system 300 in the image transmitter apparatus to the receiver.

[0074] The above embodiments regard the transmission of image data. The principle of the present invention is, however, not restricted to this arrangement, but is applicable for transmission of text data. Namely, the 'original data' in this specification means various types of data, such as image data and text data. In the case of transmission of text data, the preview data generated corresponding to the text data may be abstract data representing an abstract of the text data, extraction data representing first several rows in the text data, or attribute data obtained by extracting the attribute information attached to the text data as discussed in the above embodiments. Namely, the 'preview image' in this specification means various types of images represented by data, such as preview image data and preview text data.

[0075] In the above embodiments, the image data server 200 is connected to the receiver via the Internet 500. The principle of the present invention is, however, not restricted to the Internet, but these apparatuses may be connected to each other via a telephone communication network, a LAN, a WAN (including an intranet), or any other network.

[0076] In the above embodiments, the contents of the preview data are displayed on the screen of the monitor. Alternatively the contents of the preview data may be printed on the printing paper with the printer. The contents of the image data are printed on the printing paper with the printer in the above embodiments. Alternatively the contents of the image data may be displayed on the screen of the monitor. Both the data may be output by any output means other than the monitor or the printer, in order to enable the user to visually check the contents of the data.

[0077] In the above embodiment, the image data transmitted from the computer system 300 in the image transmitter apparatus to the receiver via the image data server 200 consists of the gray-scale bit-map data of R, G, and B. The principle of the present invention is, however, not restricted to such image data, but is applicable to any image data having the data structure that is independent of the control codes of the printer or the like.

[0078] It should be clearly understood that the above embodiments are only illustrative and not restrictive in any sense.

Claims

1. A data transfer system comprising: a transmitter; and a receiver connected to the transmitter via a network;

the transmitter including a memory that stores original data, a first transmission unit that transmits the original data and preview data created corresponding to the original data, and a first controller that controls operation of the transmitter,

the receiver including a second transmission unit that receives at least the preview data, an input unit, an output unit; and a second controller that controls operation of the receiver, the first controller causing the first transmission unit to send the preview data to the receiver, whereas the second controller receiving the preview data from the second transmission unit and subsequently causing the output unit to output a preview image represented by the preview data,

the second controller causing the second transmission unit to send a request for transfer of the original data to the transmitter when an instruction for transfer of the original data is input into the receiver via the input unit, the first controller causing the first transmission unit to send the original data stored in the memory to at least one of the receiver and another apparatus connected to the network when receiving the request for transfer of the original data from the first transmission unit.

2. A data transfer system in accordance with claim 1, wherein the output unit includes a display device, the first controller causes the first transmission unit to send user interface data together with the preview data to the receiver, whereas the second controller receives the user interface data from the second transmission unit and subsequently causes the display device to display a user interface window represented by the user interface data,

the second controller causes the second transmission unit to send specification information, which is used to cause the output unit to output a image represented by the original data, together with the request for transfer of the original data to the transmitter when the specification information is input together with the instruction for transfer of the original data into the receiver via the input unit,

the first controller causes the first transmission unit to send at least part of the specification information to the apparatus, to which the original data is to be transmitted, when receiving the specification information from the first transmission unit.

3. A data transfer system in accordance with claim 1 or 2, wherein the second controller causes the second transmission unit to send address information that specifies a location on the network, to which the original data is to be transmitted, together with the request for transfer of the original data to the transmitter when the address information is input together with the instruction for transfer of the original data into the receiver via the input unit, and wherein the first controller causes the first transmission unit to send the original data to the location specified by the address information when receiving the address information from the first transmission unit.

4. A transmitter for transmitting data to a receiver via a network, the transmitter comprising:

a memory that stores original data;
a transmission unit that transmits the original data and preview data created corresponding to the original data; and
a controller that controls operation of the transmitter,
the controller causing the transmission unit to send the preview data to the receiver,
the controller causing the transmission unit to send the original data stored in the memory to at least one of the receiver and another apparatus connected to the network when receiving a request for transfer of the original data transmitted from the receiver via the transmission unit.

5. A receiver for receiving data from a transmitter via a network, the receiver comprising:

a transmission unit that receives at least preview data created corresponding to original data;
an input unit;
an output unit; and
a controller that controls operation of the receiver,
the controller causing the output unit to output a preview image represented by the preview data when receiving the preview data transmitted from the transmitter via transmission unit,
the controller causing the transmission unit to send a request for transfer of the original data to the transmitter when an instruction for trans-

fer of the original data is input into the receiver via the input unit.

6. A method of transmitting data between a transmitter and a receiver each connected to a network, the method comprising the steps of:

(a) causing the transmitter to transmit preview data created corresponding to original data to the receiver;
 (b) causing the receiver to output a preview image represented by the preview data when the receiver receives the preview data;
 (c) causing the receiver to transmit a request for transfer of the original data to the transmitter when an instruction for transfer of the original data is input into the receiver; and
 (d) causing the transmitter to transmit the original data to at least one of the receiver and another apparatus connected to the network when the transmitter receives the request for transfer.

7. A method in accordance with claim 6, wherein the step (a) comprises the step of: causing the transmitter to transmit user interface data together with the preview data to the receiver, wherein the step (b) comprises the step of: causing the receiver to output a user interface window represented by the user interface data when the receiver receives the user interface data together with the preview data, wherein the step (c) comprises the step of: causing the receiver to transmit specification information, which is used to cause a image represented by the original data to be output, together with the request for transfer of the original data to the transmitter when the receiver receives the specification information together with the instruction for transfer of the original data, and wherein the step (d) comprises the step of: causing transmitter to transmit at least part of the specification information to the apparatus, to which the original data is to be transmitted, when the transmitter receives the specification information together with the request for transfer.

8. A method in accordance with claim 6 or 7, wherein the step (c) comprises the step of: causing the receiver to transmit address information that specifies a location on the network, to which the original data is to be transmitted, together with the request for transfer of the original data to the transmitter when the receiver receives the address information together with the instruction for transfer of the original data, and wherein the step (d) comprises the step of: causing the transmitter to transmit the original data to the


location specified by the address information when the transmitter receives the address information together with the request for transfer.

9. A computer program product that causes a computer to transmit data to a receiver via a network, the computer program product comprising:

a computer readable medium;
 a first program code unit that causes the computer to transmit preview data created corresponding to original data to the receiver;
 a second program code unit that causes the computer to receive a request for transfer of the original data when the receiver transmits the request for transfer; and
 a third program code unit that causes the computer to transmit the original data to at least one of the receiver and another apparatus connected to the network when the computer receives the request for transfer, wherein each of the program code units is stored on the computer readable medium.

10. A computer program product in accordance with claim 11, wherein the first program code unit causes the computer to transmit user interface data together with the preview data to the receiver, wherein the second program code unit causes the computer to receive specification information, which is used to cause a image represented by the original data to be output, together with the request for transfer of the original data when the receiver transmits the specification information together with the request for transfer, and wherein the third program code unit causes the computer to transmit at least part of the specification information to the apparatus, to which the original data is to be transmitted, when the computer receives the specification information together with the request for transfer.

Fig. 1

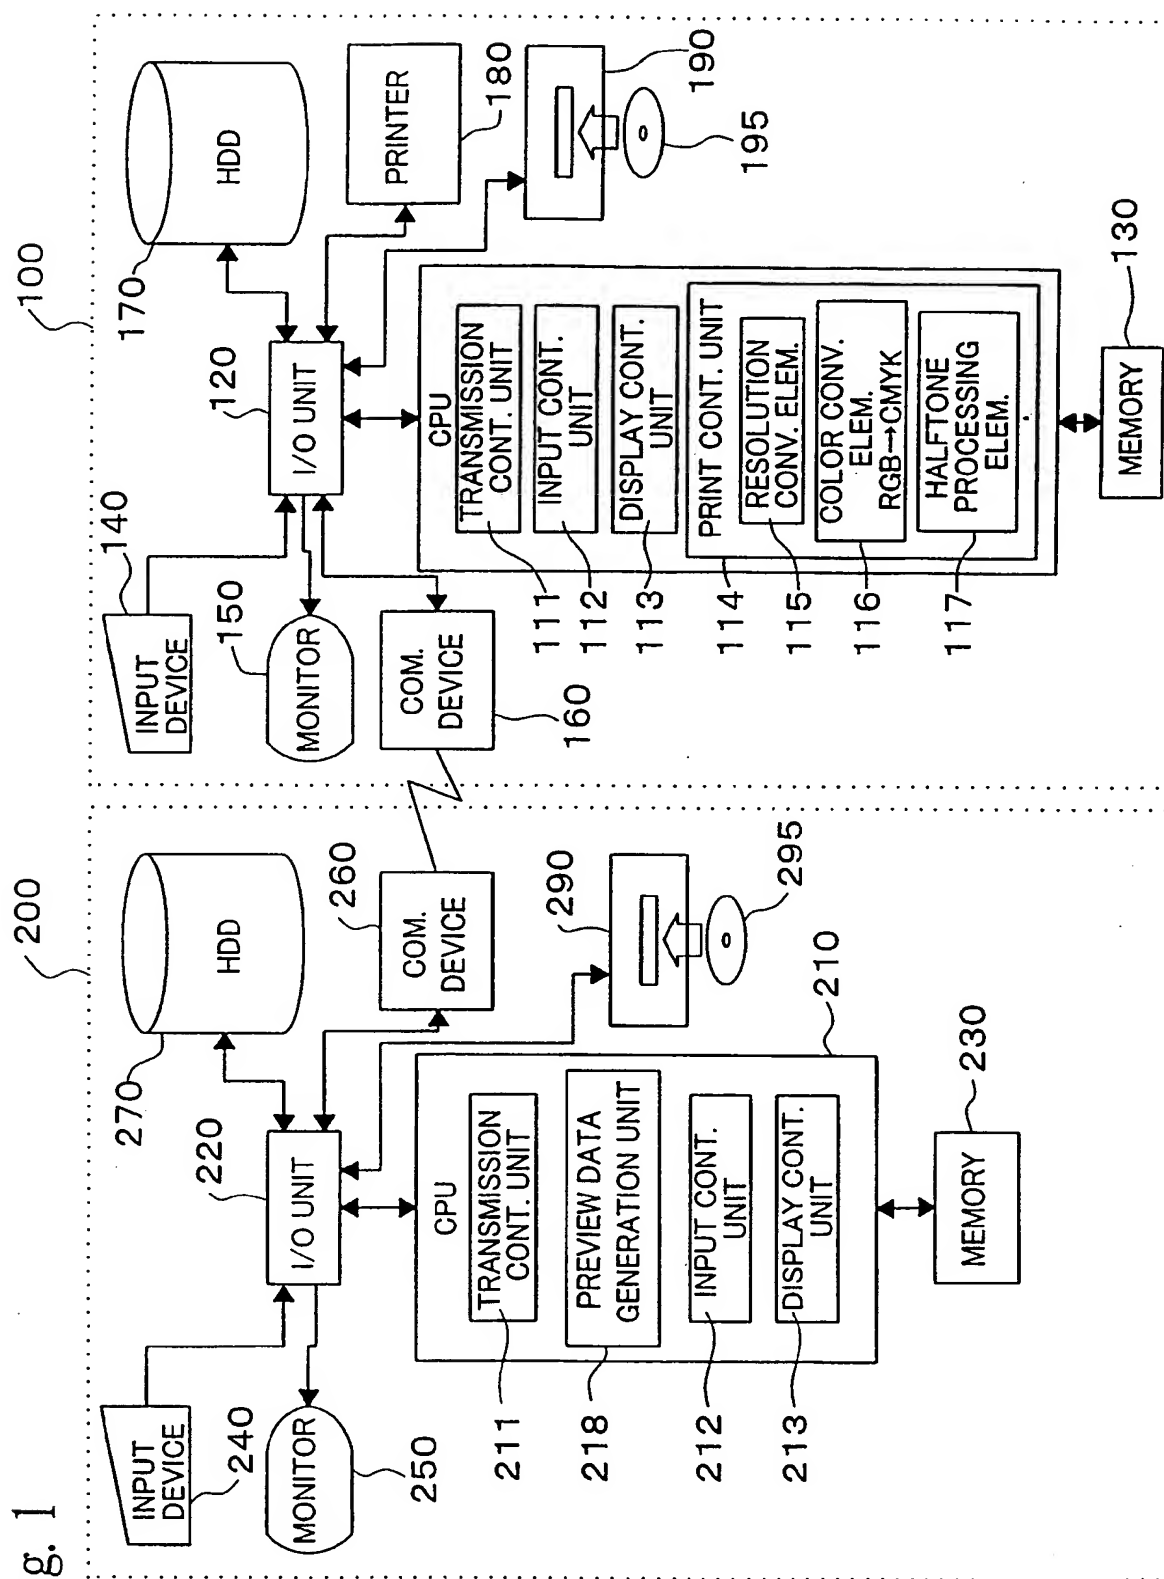

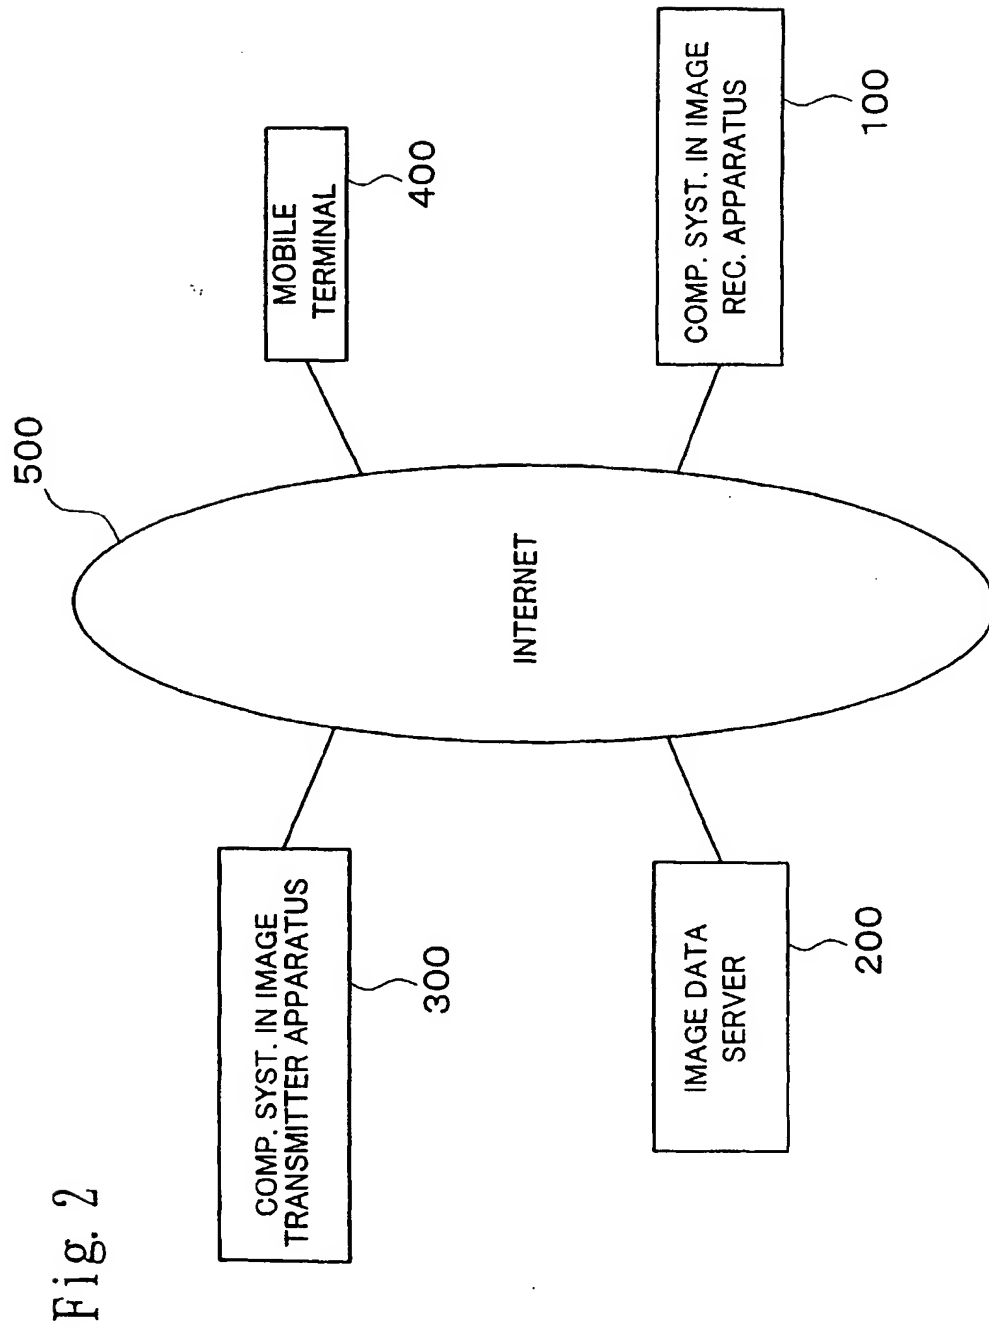


Fig. 3

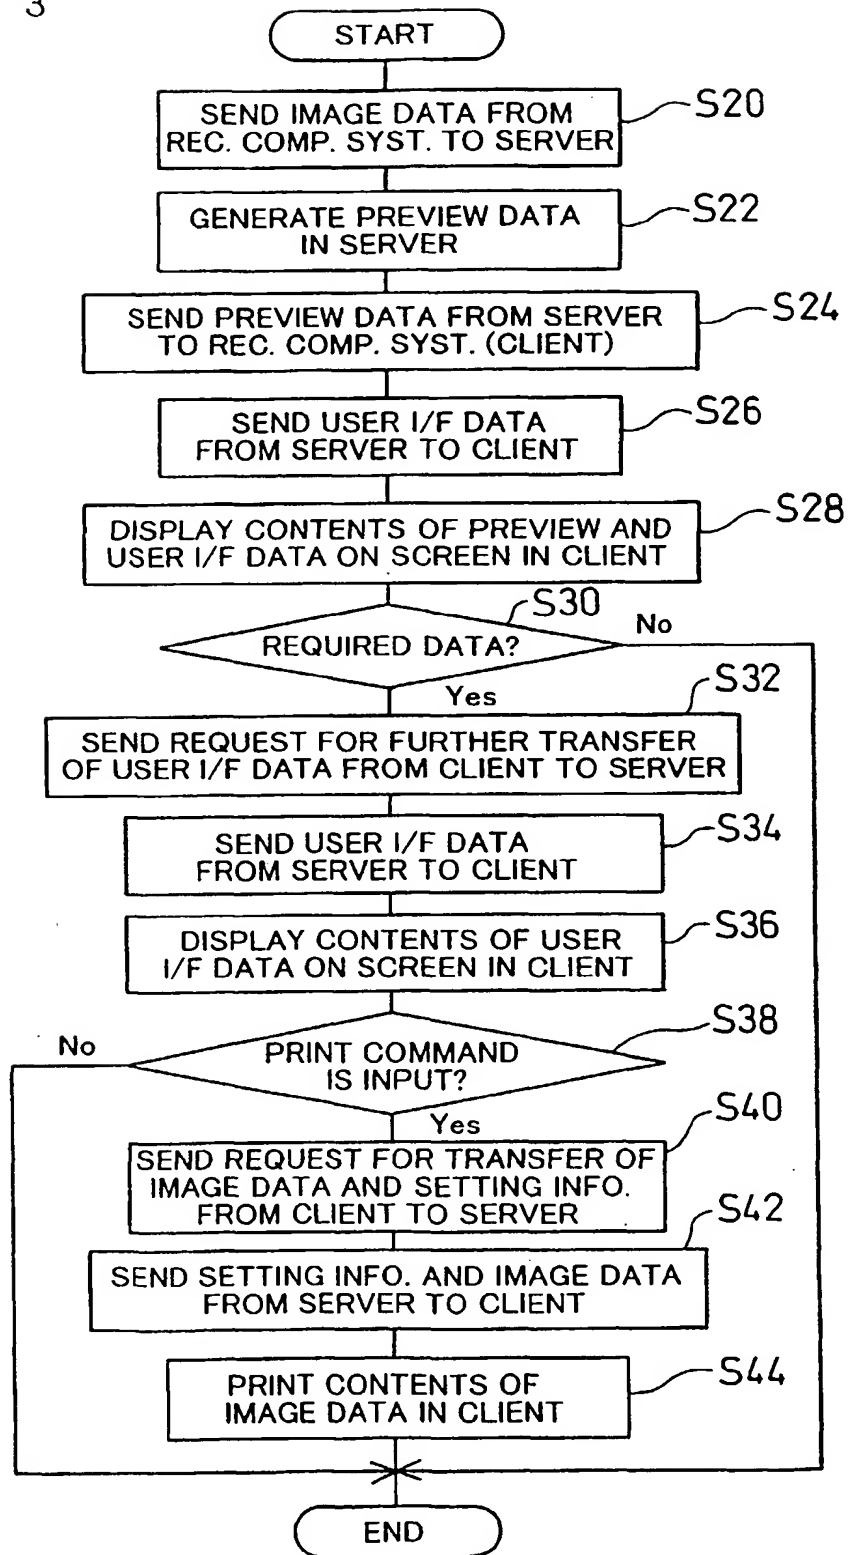


Fig. 4

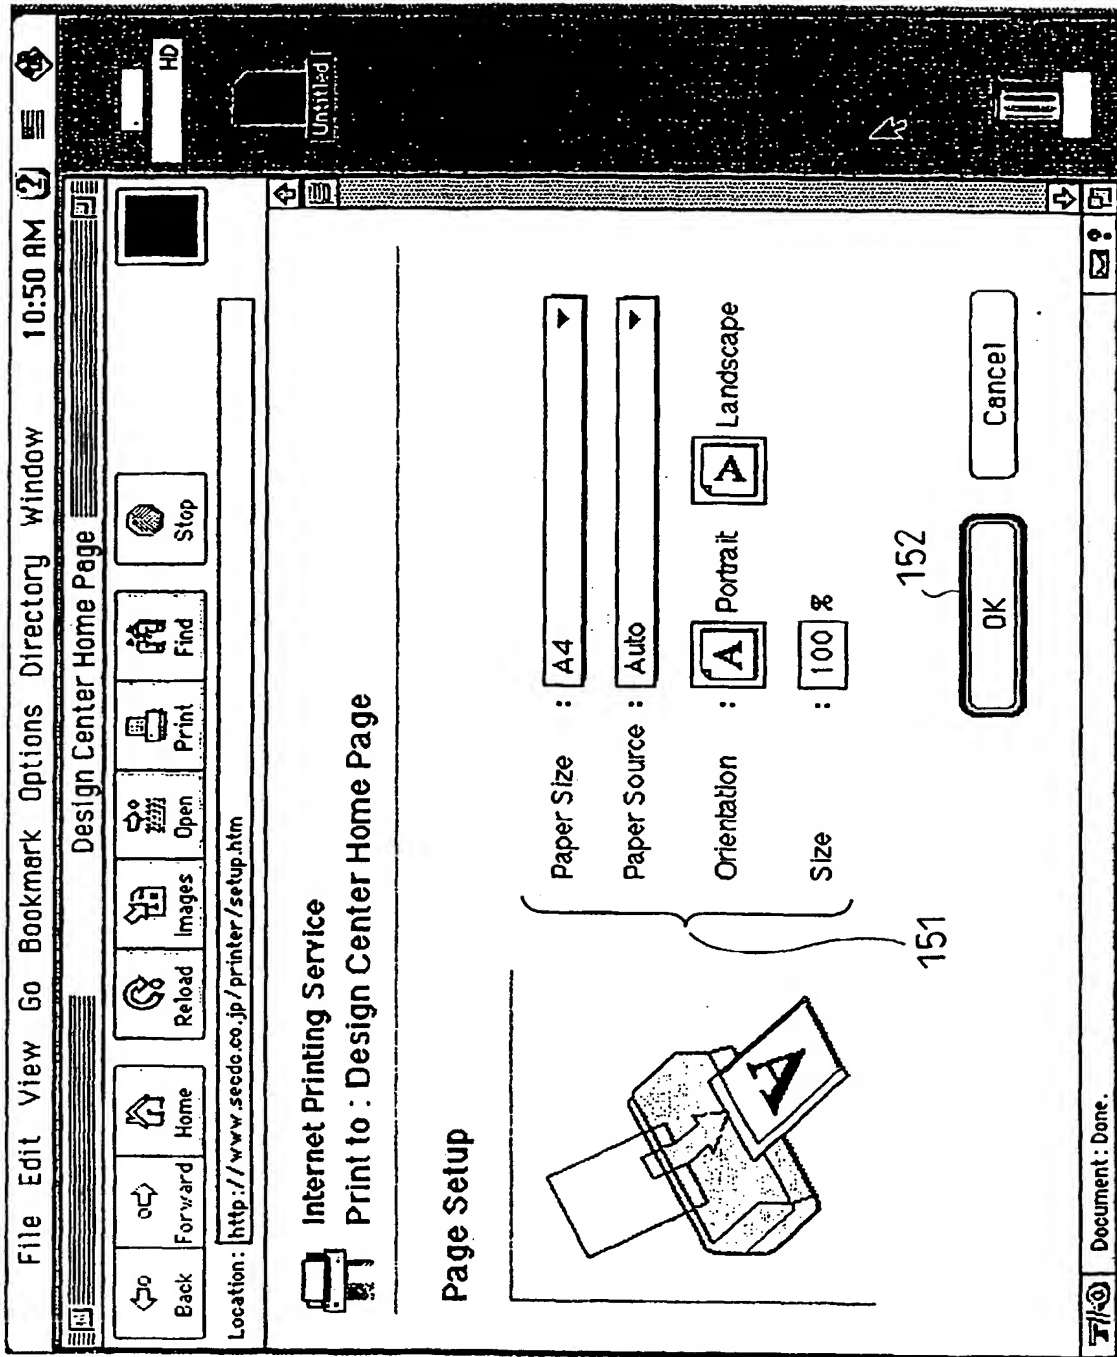


Fig. 5


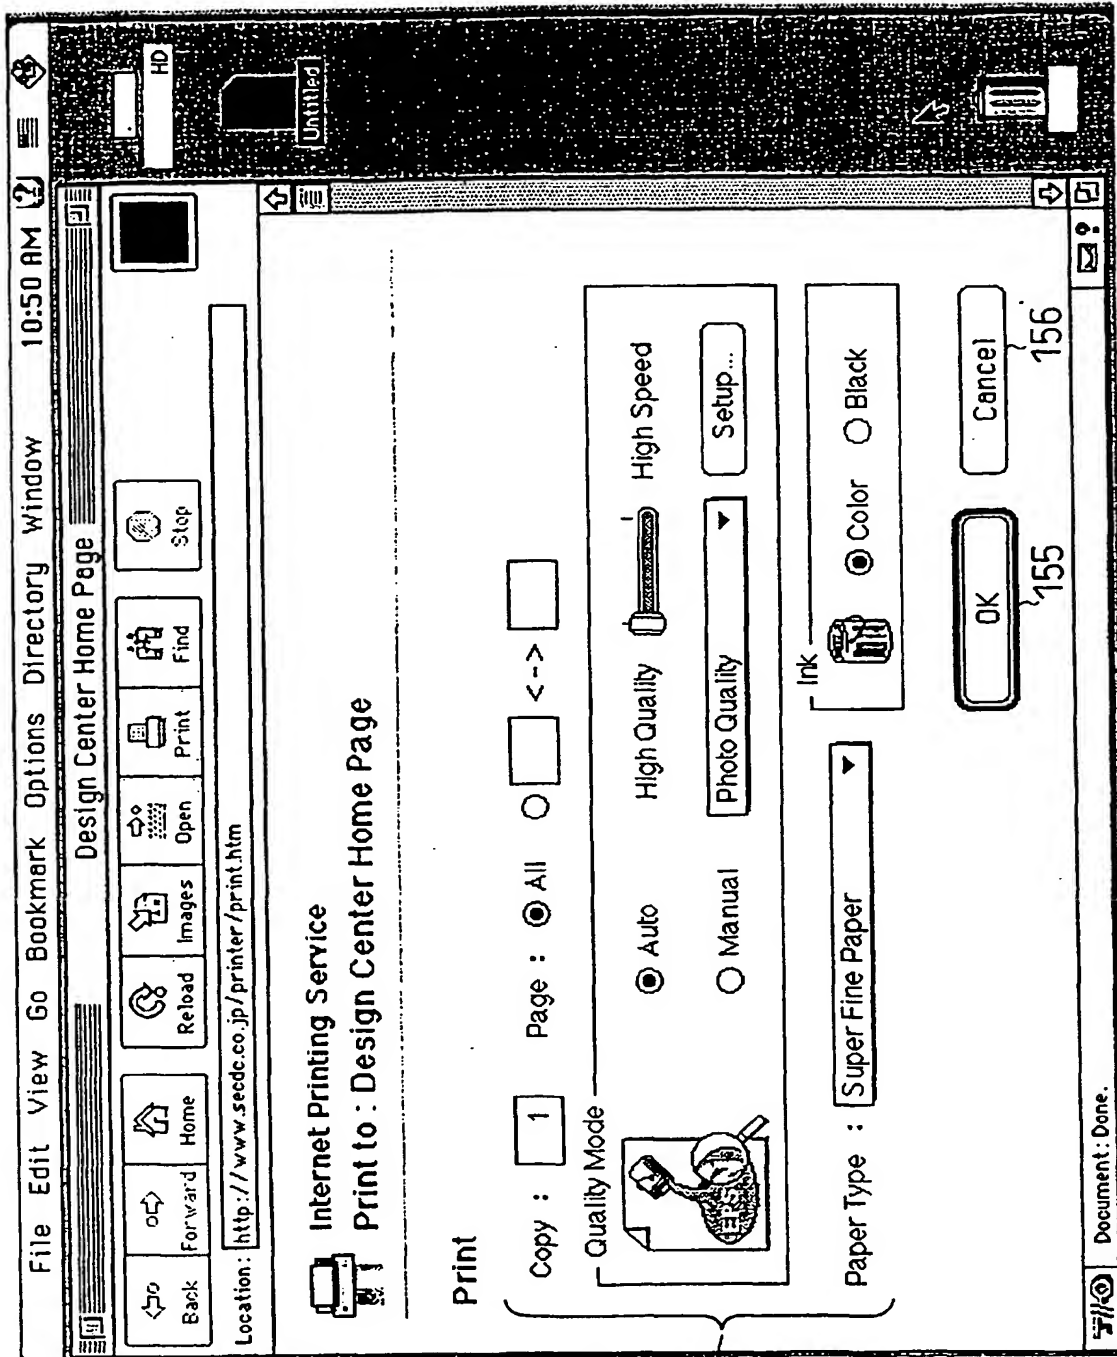


Fig. 6



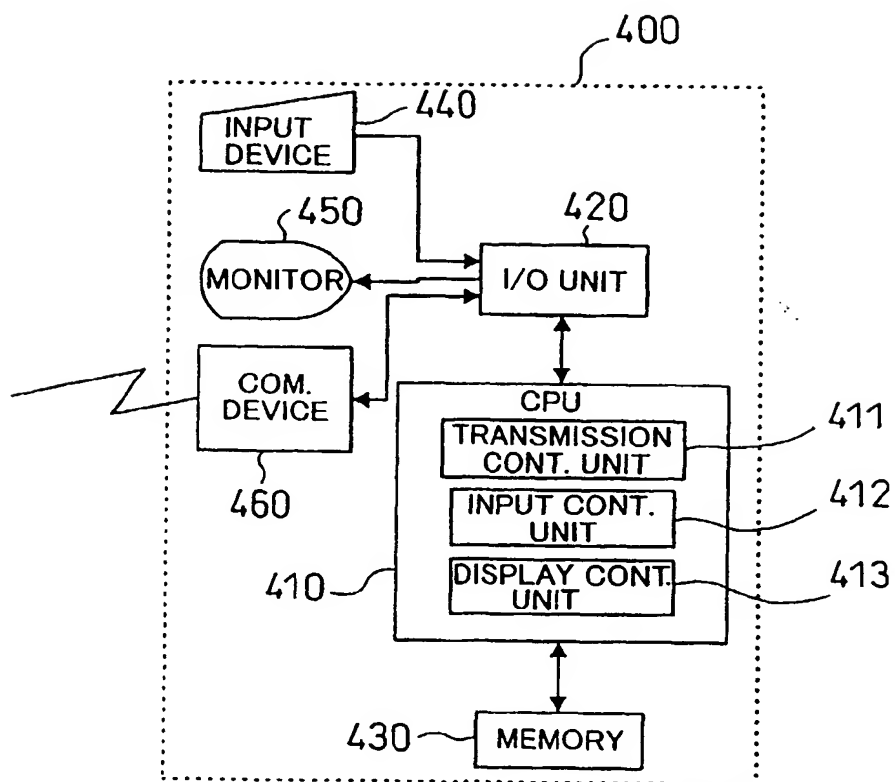

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 98 31 0754

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	EP 0 737 930 A (SUN MICROSYSTEMS INC) 16 October 1996 * abstract * * column 2, line 43 - column 3, line 47 * * column 9, line 11 - column 12, line 40 * * claim 1 * * figure 4 * * figures 11-14 *	1-10	H04L29/06
X	ORTEGA A ET AL: "A FRAMEWORK FOR OPTIMIZATION OF A MULTIREOLUTION REMOTE IMAGE RETRIEVAL SYSTEM" PROCEEDINGS OF THE CONFERENCE ON COMPUTER COMMUNICATIONS (INFOCOM), TORONTO, JUNE 12 - 16, 1994, vol. 2, 12 June 1994, pages 672-679, XP000496523 INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS * page 672 *	1-10	
X	EP 0 696 121 A (AT & T CORP) 7 February 1996 * column 1, line 15 - column 3, line 57 * * column 4, line 56 - column 5, line 34 *	1-10	TECHNICAL FIELDS SEARCHED (Int.Cl.6) H04L G06F
A	WO 92 05655 A (EASTMAN KODAK CO) 2 April 1992	1-10	
A	LAU T: "BUILDING A HYPERMEDIA INFORMATION SYSTEM ON THE INTERNET" SCALING NEW HEIGHTS IN TECHNICAL COMMUNICATION, BANFF, SEPT. 28 - OCT. 1, 1994, 28 September 1994, pages 192-197, XP000510688 INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS	1-10	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 26 May 1999	Examiner Canosa Areste, C
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03 82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 98 31 0754

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

26-05-1999

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0737930 A	16-10-1996	CA 2173698 A	13-10-1996
		JP 9167124 A	24-06-1997
EP 0696121 A	07-02-1996	CA 2150058 A	26-01-1996
		JP 8095915 A	12-04-1996
WO 9205655 A	02-04-1992	AU 8761191 A	15-04-1992
		CA 2068723 A	15-03-1992
		CN 1062253 A	24-06-1992
		EP 0500924 A	02-09-1992
		JP 5502782 T	13-05-1993

EPO FORM P459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)